


# EZ-DOME-SLIM

560 TVL Slim True Day/Night  
Varifocal Dome Camera

## Ultra Wide Dynamic Slim Dome Camera



Featuring Pixims WDR Digital Imaging device the EZ-Slim-Dome camera delivers a high quality hi-res image in a variety of light conditions. With True Day/Night technology and 560 TVL resolution, it also produces an accurate and detailed night time image. Slimmer than many other Dome cameras the Slim Dome also features a 3-Axis mount for easy installation to any surface as well as featuring an easy-use OSD (with remote) for multiple option control.

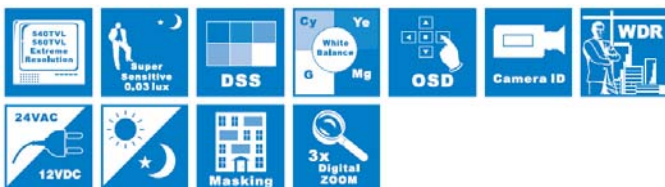

## Features

- 1/3" PIXIM WDR DIGITAL IMAGING DEVICE
- EASY-USE OSD WITH REMOTE CONTROL
- TRUE DAY/NIGHT (ICR)
- ULTRA WIDE DYNAMIC RANGE
- DIGITAL SLOW SHUTTER
- 12V DC OR 24V AC
- HI RES 540 TVL (DAY)/560 TVL (NIGHT)
- TRI-AXIS MECHANISM
- PRIVACY MASKING
- 3.3mm – 12mm LENS
- RS 485 FOR REMOTE CONTROL ON SCREEN SETUP



# EZ-DOME-SLIM

560 TVL Slim True Day/Night  
Varifocal Dome Camera



## No "Camera Blindness"



Ultra Wide Dynamic Technology eliminates problems with high-contrast images such as vertical smear and picture blooming.

## No " Camera Blindness"



Normal CCD Camera

Ez-Dome-Slim

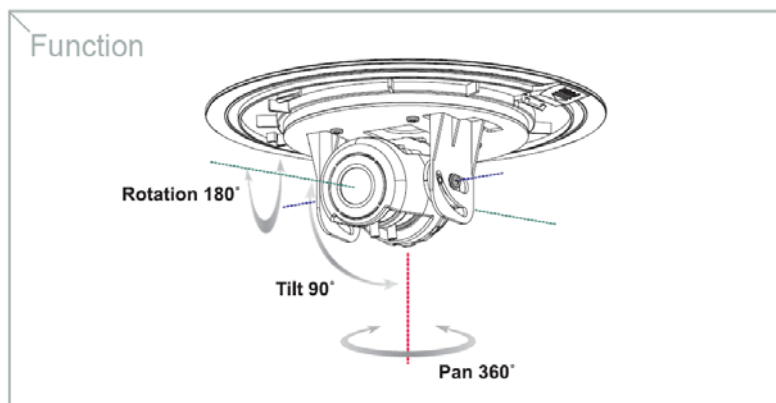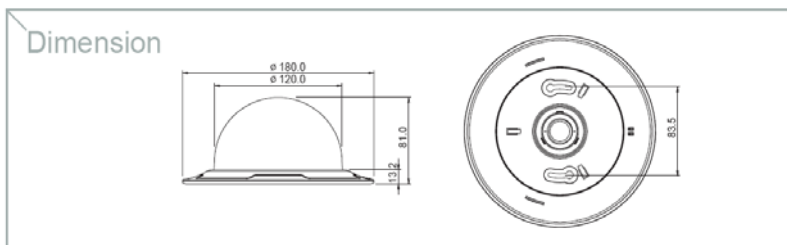

## Specification

Model	EZ-DOME-SLIM
CCD Type	1/3" Pixim WDR digital
Pixel Array	PAL 720 (H) x 540 (V)
Horizontal Resolution	540TVL (Day) 560TVL (Night)
Minimum Illumination	0.6 Lux @ F1.4
Backlight Compensation	On/Off
White Balance	2000'K – 11000'K auto
Day / Night	Yes, True Day/Night (ICR)
Lens Mount	3.3mm~12mm Varifocal DC Iris
Power Source	Dual Voltage 12V DC/24V AC
Power Consumption	90mA (24V) 130mA (12V)
Operating Temperature	-10° to 50° C
Weight	400g (approx)
Dimension	180mm(L) x 81mm(D)