


GV-4008

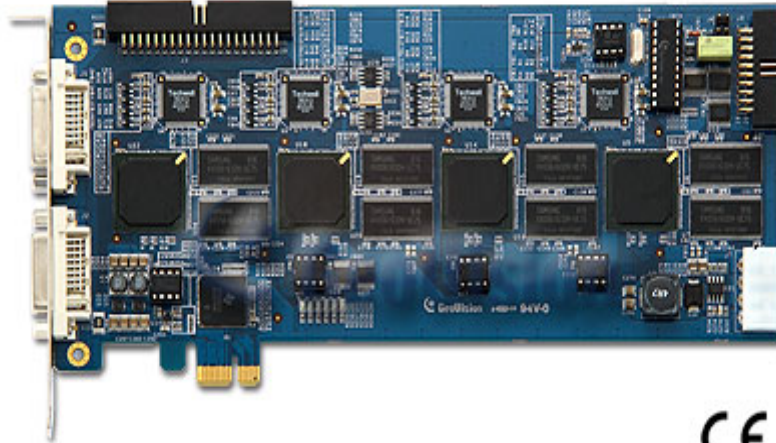

The GV-4008 Card provides up to 8 video and 8 audio channels, recording up to 240/200 fps (NTSC/PAL) in total with H.264 hardware compression. The new technology of resolution is employed to enhance the live image of D1 without DSP Overlay. Even in screen divisions, the largest division can remain at the high-quality D1 resolution.

Specifications

Input Type	DVI x 2
Video Input(s)	8 Cams
Audio Input(s)	8 Channels
Total Recording Rate HW: At 720 X 480 Resolution SW: At 320 X 240 Resolution	240 fps (NTSC), 200 fps (PAL)
GV-NET/IO Card Support	Yes
GV-I/O 12-IN Card Support	Yes
GV-I/O 12-Out Card Support	Yes
Hardware Watchdog	Yes
Dimensions (W x H)	169 x 110 (mm) / 6.65 x 4.33 (in)
Installation Guide	GV-4008

Note:

1. GV-4008 is currently not compatible with VIA series and ATI series chipset motherboards, and 64-bit Windows operating system.
2. To work together with GV-4008, GV-NET/IO Card V3.1 must be set in the I/O Box Mode and connected to the PC through USB.
3. GV-4008 does not support the TV-Out function.

Minimum System Requirements For One Card

OS Supported	Windows XP / Windows Server 2003 / Windows Vista (Not support 64-bit version of Windows)
CPU	Core 2 Duo 2.33 G
RAM	2 x 1 GB Dual Channels
HDD	250 GB
VGA	ATI Radeon X1300 PCI-E / NVIDIA GeForce 7300 PCI-E
DirectX	9.0c

Minimum System Requirements For Two Cards

OS Supported	Windows XP / Windows Server 2003 / Windows Vista (Not support 64-bit version of Windows)
CPU	Core 2 Quad 2.4 G
RAM	2 x 1 GB Dual Channels
HDD	500 GB
VGA	ATI Radeon X1300 PCI-E / NVIDIA GeForce 7300 PCI-E
DirectX	9.0c