


17x, 22x and 25x Day/Night High Speed Dome

FEATURES

- Various zoom options: 17x, 22x and 25x Day/Night
- 128 Programmable Presets
- 480 TVL / 480 TVL / 570 TVL (PIH-7625 version)
- 0.3 LUX / 0.01 LUX (PIH-7625 version)
- Can be controlled via GeoVision



PIH-7625/7600/7000-PL

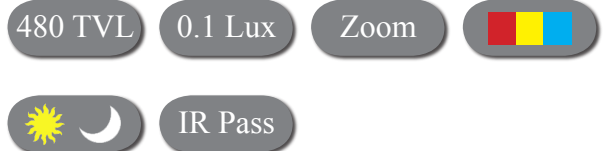

SPECIFICATION

Model	PIH-7625	PIH-7600	PIH-7000
Image Sensor	Sony Hi Res. eX-view HAD CCD	Sony Hi Res CCD	Sony Hi Res CCD
No. of Pixels	PAL 752(H) x 582(V)	PAL 795(H) x 596(V)	PAL 795(H) x 596(V)
Horizontal Resolutions	570 TVL (Mono) 480 TVL (Colour)	480 TVL	480 TVL
Minimum Illumination	0.05 (Mono) 0.1 (Colour) LUX	0.3 LUX	0.3 LUX
S/N Ratio	Better than 50 dB	Better than 50 dB	Better than 50 dB
White Balance	Auto Correction / Tracking / Fix	Auto Correction / Tracking / Fix	Auto Correction / Tracking / Fix
Focal Length	3.8-95mm	3.9-86mm	3.9-66.6mm
Power Source	12VDC	12VDC	12VDC
Power Consumption	Max 13W	Max 13W	Max 13W
Operating Temperature	-5 Degrees C to +50 Degrees C	-5 Degrees C to +50 Degrees C	-5 Degrees C to +50 Degrees C
Dimensions	208mm (H) x 145mm (D)	208mm (H) x 145mm (D)	208mm (H) x 145mm (D)
Optical Zoom	25X	22X	17X

*Specification and image are subject to change without any notification