

DIGITAL SURVEILLANCE & IP SPECIALISTS

POWER SUPPLIES

EZ-PSU-124M6P16Q

The power supply is the cost-effective way to power multiple cameras. This power supply provides 8 adjustable 12.0~15.1 VDC outputs, plus another 8 outputs at 24VAC, all separately fused. All outputs have individual PTC2 fusing and individual status LEDs, as well as surge protection and input fuses to provide the highest level of protection, packaged in the toughest metal enclosure.

FEATURES

- Each output individually fused (PTC2 fuses).
- Each output channel rated 1.1A@250VAC.
- Main power switches to turn on/off power to outputs.
- 110VAC Input, 60Hz.
- UL-approved power transformer.
- Max total continuous output current: 3A@12VDC & 3A@24VAC
- Main fuse rated 5A@250VAC
- Spare fuse and 6ft (1.8m) power cord included.
- Heavy-duty steel case to protect the power connections.
- Removable steel cover for easy access to power connections.
- Ventilation holes to prevent heat build-up.
- Dimensions: 123/16"x127/16"x39/16" (310x316x90 mm)
- Knock-out on the cover for optional cam lock.
- AC terminal block for easy connection from transformer to power cord.

EZ-PSU-2AMP, 4AMP, 6AMP

2AMP: 12V DC 2AMP 4 Output Block Power Supply.

4AMP: 12V DC 4AMP 9 Output Block Power Supply.

6AMP: 12V DC 6AMP 16 Output Block Power Supply.

FEATURES

- Individually protected PTC -type fused outputs
- Individual status LED indicator
- Main power switch with surge protection
- DC models are adjustable from 5.6~8.15VDC or 12.6~15.15VDC
- Spare fuse included
- Knock-out on the cover for optional cam lock

EZ-PSU-4AMP-24VAC


24V AC 4AMP 4 Output Block Power Supply

FEATURES


- Main power switch to turn on/off power to outputs
- Spare fuse included




EZ-PSU-124M6P16Q

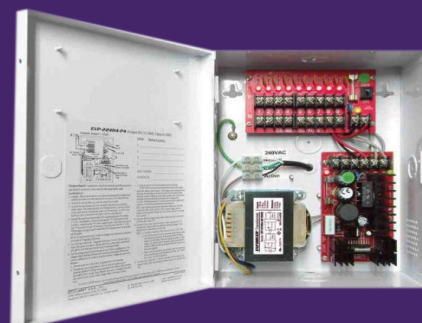

EZ-PSU-2 & 4AMP

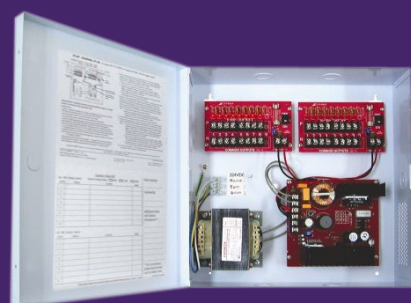

EZ-PSU-6AMP

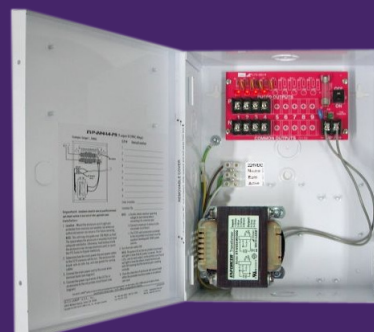

EZ-PSU-4AMP-24VAC