



**1/4" CL 35x (ICR) Auto Focus Zoom Camera  
(EX-view)**

- Sony EX-View HAD CCD sensor
- 35x optical zoom, 16x digital zoom
- Day & Night (IR-Cut filter Removable, ICR)
- On Screen Display (OSD) set-up menu
- Built-in 5 keys to control zooming, focusing function and setup menu adjustment
- Support functions: AI, AWB, AGC, BLC, FL, Positive / Negative, Auto Focus, Audio function
- Support YOKO / PELCO D&P / LG protocol




**Specifications**

Model Name	YK-A702
Image Device	1/4" Color Sony EX-View HAD
Picture Elements	NTSC:768x494, PAL:752x582
Resolution	480 TVL
Min. Illumination	0.05 Lux (Night / BW), 0.12 Lux (Day / Color) / F1.6
S/N Ratio	More than 48dB
Electronic Shutter	NTSC:1/60~1/30,000, PAL:1/50~1/30,000
Flickerless Mode	On / Off (NTSC:1/100, PAL:1/120)
Iris Control	Auto / Manual
Lens Furnished	35x Auto Focus Zoom (3.43~120mm / F1.6~4.5), Video AF
Digital Zoom Ratio	Basic 16x (Total Zoom Ratio 352x), 2x~16x variable
Min. Shutting Distance	0.01m (Wide), 1.5m (Tele)
Camera Control	Optional: RS-422/ RS-485/ RS-232
Remote Control	6-pin Circular Connect: Zoom, Focus, A/D key, DC12V IN
Key Control	Tele (Up), Wide (Down), Near (+), Far (-), Menu
Protocol	YOKO / PELCO D&P / LG
Zoom Speed	8 / 11 / 14 sec mode
Zoom / Focus Preset	128 preset points
Focus Mode	Auto / Manual / Push Auto
On Screen Display	Set-up menu
Negative / Positive	On / Off
Day & Night (ICR)	AE / Sensor / Day / Night / External
Day & Night Control	Day & Night output / Day & Night External input
Brightness Control	Manual
Wide Burst	On / Off
White Balance	Auto / Hue / Indoor / Outdoor / Manual / Push Auto
Gain Control	Auto / Manual
Back Light Comp.	On / Auto (Center / Up / Down / Left / Right) / Super / Off
Sync. System	Internal
Video Output	1 Vp-p / 75 Ohms
Audio Output	2 Vp-p / 50 Ohms
Power Supply	DC12V±10%

Power Consumption	340mA max.
Operating Temp.	-10°C ~50°C

Design and specifications are subject to change without notice.

☑ **Dimensions**

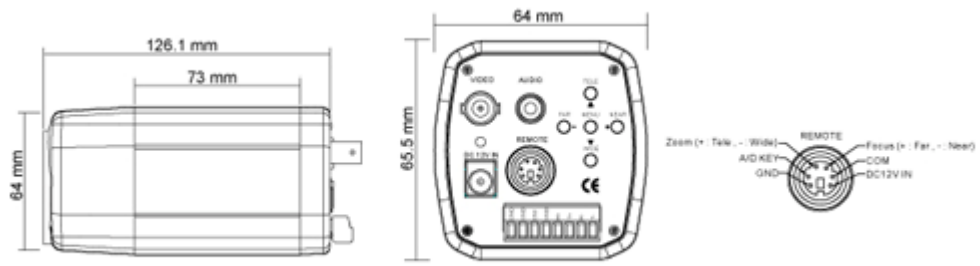

☑ **Option**



IV-S407



IV-S201