

EZ-DAY/NIGHT-3AXIS-VD-WDR

Wide Dynamic 540 TVL IR Anti Vandal
True Day/Night Varifocal Dome

Sony HQ-1 Wide Dynamic Anti Vandal Varifocal 3.3mm - 12mm True Day/Night 3 Axis



The EZ Day/Night-3Axis-VD-WDR is a WDR camera for professional 24hr surveillance. The True Day/Night technology automatically changes from colour to B/W at a designated Lux level which can be programmed via the easy-use OSD. The wide dynamic technology, also accessed via the OSD, allows the user to set up the camera for optimum capture in varying contrast levels. A dual voltage power supply maximizes reliability incase of power fluctuations.



Features

- 1/3" SONY HQ1 CCD
- 540 TVL (DAY) / 580 TVL (NIGHT)
- 0.0001 LUX @F1.6
- VARIFOCAL AUTO IRIS 3.3MM-12MM LENS
- ANTI-VANDAL
- WDR (WIDE DYNAMIC RANGE)
- ON SCREEN MENU VIA REMOTE OR RS 485
- TRUE DAY/NIGHT
- 12V DC OR 24V AC
- ADDITIONAL VIDEO OUTPUT FOR SIMPLE INSTALLATION
- DIGITAL SLOW SHUTTER (DSS)
- TRI-AXIS MECHANISM



EZ-DAY/NIGHT-3AXIS-VD-WDR

Wide Dynamic 540 TVL IR Anti Vandal
True Day/Night Varifocal Dome




SUPER WIDE DYNAMIC (Swdr)

Controllable Light Level via OSD for optimum image contrast.



Digital Slow Shutter

Allows the camera to display a bright image even in extreme darkness.

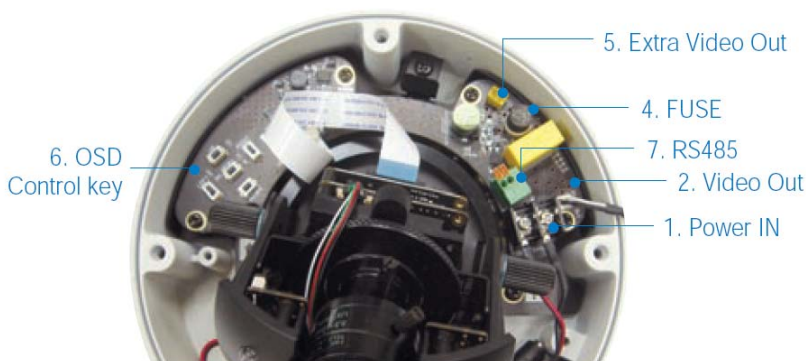

Specification

Model	EZ-DAY/NIGHT 3 AXIS-VD-WDR
CCD Type	1/3" Sony HQ-1 Ex-View
Pixel Array	PAL 752 (H) x 582 (V)
Horizontal Resolution	540TVL (Day) 580TVL (Night)
Minimum Illumination	0.0001 Lux (Colour) 0.003 (B/W)
Lens Mount	3.3mm – 12mm Varifocal Auto Iris
Backlight Compensation	On/Off
White Balance	1800'K – 10500'K auto
Day / Night	Yes, True
Lens Mount	3.3mm~12mm Varifocal Auto Iris
Power Source	Dual Voltage 12V DC/24V AC
Power Consumption	240mA (12V) 120mA (24V)
Operating Temperature	-10 to 50 Degrees C
Weight	500g (approx)
Dimension	121.5(W) x 164(D)